

9. Rec LED

11. Enter

12. Menu

10. ESC button

15. HDMI port


13. Power/Charge LED

14. Earphone socket


16. Mini USB socket

- 1. Left right button
- 2. REC/Stop
- 3. Power button
- 4. Camera Lens
- 5. Vibration On/Off
- 6. Disguised lens
- 7. Battery cover
- 8. Reset

# 2. Package Content

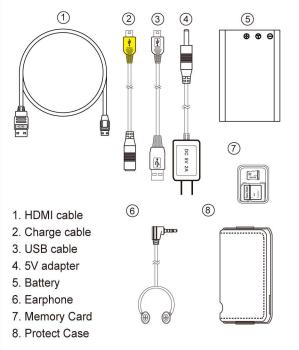

## 3. Insert Battery and Memory Card



## 4. Charging Battery

## There are two ways to charge battery.

1 Charge by DC adapter




- 1. Connect the yellow end of the charge cable to the mini USB socket.
- 2. Plug the DC adapter to a wall outlet, then connect the other end of the power cord to the charge cable. The LED indicator illuminates green indicating the device is in charging mode.

② Charge by USB cable



1. Connect the USB cable to the mini USB socket 16 and connect the other end to PC/laptop. The LED indicator illuminates green indicating the device is in charging mode.

#### **LED Indicator Bar**



LED will illuminate blue when the device is

LED will illuminate green when the device is charging, and it will turn off when the charging is

LED will illuminate both green and blue when the device is power on while charging.

## 5. Setting



- 1.Switch 2 to Stop before turning on. 2.Press3 to power on the device.
- 3.Press Menu® for 2 sconds.
- 4.Use 1 to select up/down.
- 5.Press 11 to enter the page. 6.Press<sup>®</sup> to exit the page.
- SETUP



(5)

Available at www.spygeargadgets.com

Please be careful when inserting, removing, or handling the memory card.

Gently re-install the back cover.

## 6. Recording Operation



(1)

- 1. Long press(3) to switch on the device.
- 2. Following the red arrow pointed direction, switch to Rec 2 to start recording
- 3. To stop recording, switch to STOP (2)
- 4. When the device is turned on, LED (13) will illuminate blue.
- 5. During recording, the Rec LED 9 will illuminate red.

#### 6.1. Spy Mode



Press the power button one time to turn the device into spy mode. The display will be off during recording. Press the power button again to turn on the display

### 6.2. Vibration ON/OFF




Turn the vibration mode on by switching to red arrow pointed direction.

### 6.3. Motion Detect

Enter Menu page and turn on Motion Detect. Switch to Rec, the DVR will start to record when the movement

of an object/person is detected. In motion detect mode, the recording will stop when the file size reaches 300mb.

#### 7. Playback Video File On Unit




- 1. Switch REC/Stop button 2 to Stop postion.
- 2. Press Power button (3) to switch on the device.
- 3. Press Menu (12) for 2 second to enter the menu page.
- 4. Select Playback and switch to On.
- 5. Press Left right button 1 to choose video file.
- 6. Left right button (1) serves as volume+/- button while playing
- 7. Press Esc button 10 to return to photo/video playlist.

# 8. Playback on PC/Notebook/Monitor

8.1. Connect to PC by USB cable


0



8.2. Connect to monitor by HDMI cable



8.3. Playback on PC/Notebook with memory card




## 9. Photo Shooting Operation



- 1. Switch to REC and press enter (1) to take snapshot.
- 2. The device will vibrate during snapshot (when the vibration mode is turned on.)
- 3. Long press Menu (2), and choose playback/on to enter the
- 4. Press Esc 10 to return to menu page.

#### 10. Zoom In/Out setting


Camera lens zoom in/out is functionable only when the video size is 720P (1280 X 720). Edit setting from Menu→Video Size→1280x720



Press left right button (1) to zoom in/out.

(9)

Cellphone Design Portable DVR Quick Guide



V1.0